

EXPLODED VIEW

# EASIWALL ASSEMBLY INSTRUCTIONS




*Gardening is  
looking up*

THIS KIT CONTAINS


- 1x back panel
- 2x side panels
- 5x planters
- 10x planter divides\*
- 4x bolts with washers

\*10 divides are supplied with the 1mx1m easiwall, 5 are provided with the 0.5mx1m

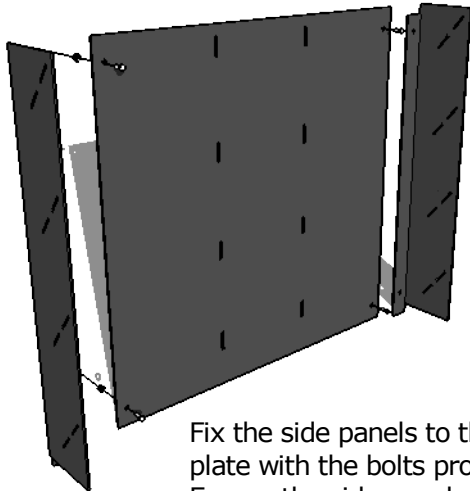


STEP 1.

Fix the side panels to the back plate with the bolts provided. Ensure the side panel returns are fixed behind the back plate.

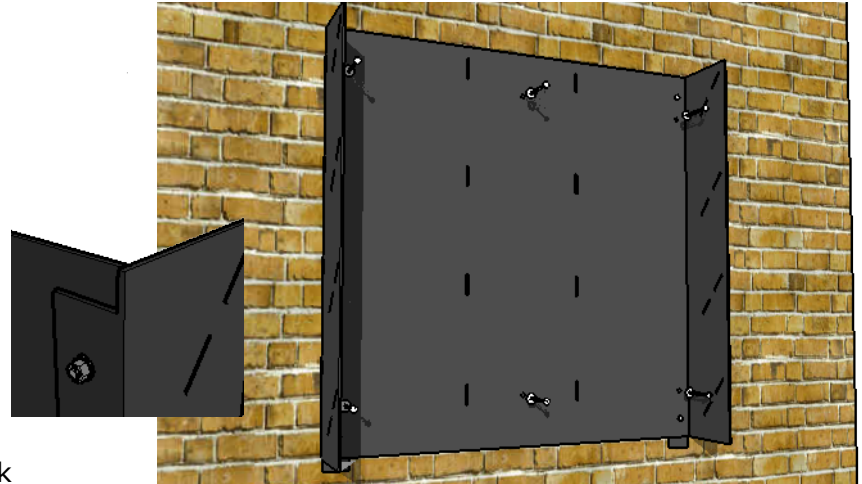


STEP 2.

The unit can now be fixed to your wall. Wall fixings not included.

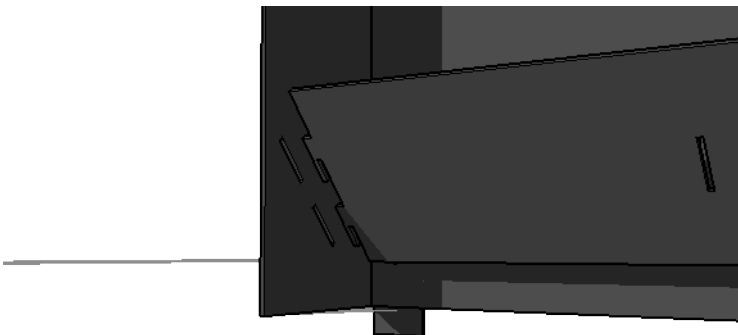


STEP 3.

Hook the bottom planter tray into the corresponding slots in the side panels, press the tray down firmly to lock it into place.

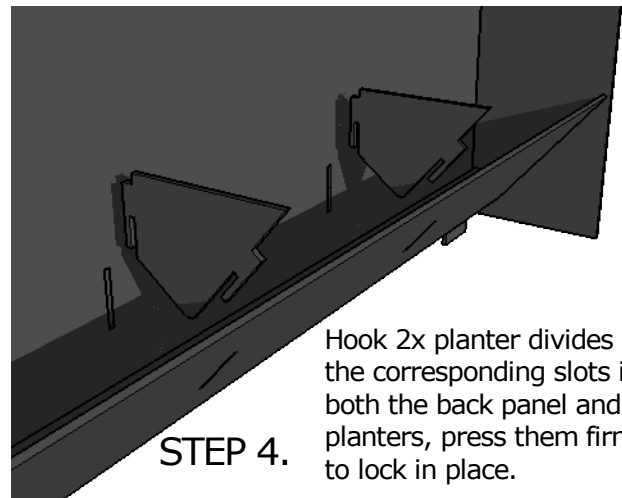

STEP 4.

Hook 2x planter divides into the corresponding slots in both the back panel and planters, press them firmly to lock in place.

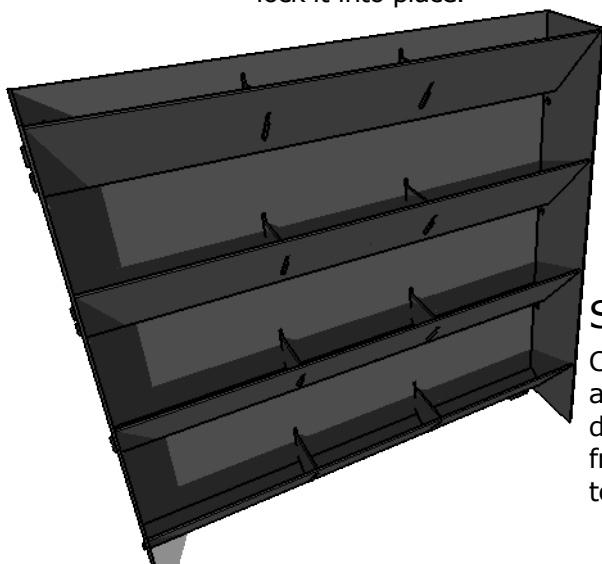

STEP 5.

Continue slotting all five planters & dividers in place from bottom to top.



STEP 6.

Add a small layer of drainage material to the base of each planter and fill the remainder with soil. Now plant the unit with your chosen vegetation.

Irrigation systems are available for the Easiwall unit. Please consult your supplier for more information.

NOTE: Treebox takes no responsibility for the security of the Easiwall to wall fixing. It is the responsibility of the installer to assess the structural capability of the selected wall and to specify the appropriate fixings required. When fixing to buildings or water sensitive areas Treebox advises Easiwall to be fixed over vertical or horizontal battens at 500cra to maintain a 25mm air gap between the panel and wall. For further advice on wall fixing please contact us at [info@treebox.co.uk](mailto:info@treebox.co.uk)